


HHK25S

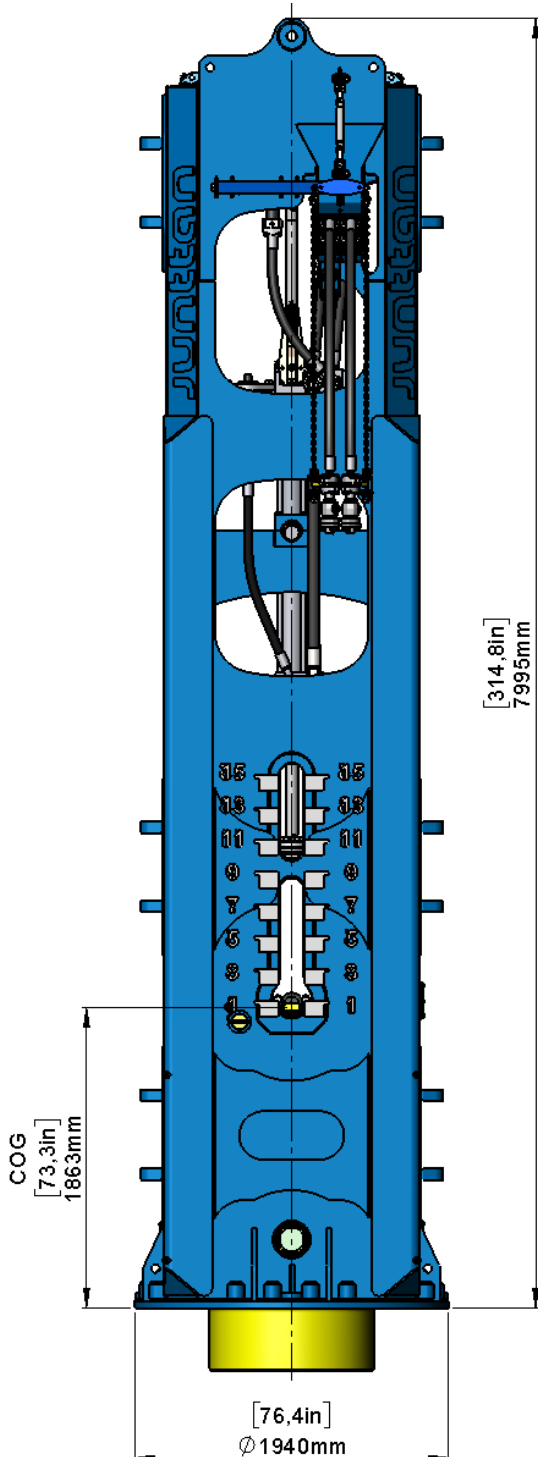

Weights

Hammer weight 40 700kg / 90 000 lb

Ram block weight 25 000 kg / 55 100 lb
(Transport weight with top plate 26 020 kg / 57 350 lb)

Hydraulics' specification

Operating pressure 244 bar / 3 539 psi

Oil flow for 30 bl/min 860 L/min
227 gpm

Pressure accumulators 2 pcs / 10 L / 2,67 gal
Nitrogen pressure 133 bar @ 20 °C
1 929 psi @ 68 °F

Return accumulators 2 pcs / 10 L / 2,67 gal
Nitrogen pressure 6 bar @ 20 °C
87 psi @ 68 °F

Pressure hoses 3 x 38 mm
3 x 1½ in

Return hoses 3 x 38 mm
3 x 1½ in

Performance

Max. energy 368 kNm / 271 238 ft-lb
Blow rate @ 368 kNm /
271 238 ft-lb 30 bl/min

Min. energy 19 kNm / 14 014 ft-lb
Blow rate @ 19 kNm /
14 014 ft-lb 100 bl/min

Stroke 1 500 mm / 5 ft

